



Research paper

# Characterising the take-off dynamics and energy efficiency in spring-driven jumping robots

John Lo<sup>a,\*</sup>, Ben Parslew<sup>a,b</sup><sup>a</sup> Department of Fluid and Environment, The University of Manchester, Manchester, M13 9PL, United Kingdom<sup>b</sup> International School of Engineering, Faculty of Engineering, Chulalongkorn University, Bangkok, 10330, Thailand

## ARTICLE INFO

## Keywords:

Jumping robot  
Multibody dynamics  
Premature take-off  
Energy efficiency  
Spring-driven

## ABSTRACT

Previous design methodologies for spring-driven jumping robots focused on jump height optimisation for specific tasks. In doing so, numerous designs have been proposed including using nonlinear spring-linkages to increase the elastic energy storage and jump height. However, these systems can never achieve their theoretical maximum jump height due to taking off before the spring energy is fully released, resulting in an incomplete transfer of stored elastic energy to gravitational potential energy. This paper presents low-order models aimed at characterising the energy conversion during the acceleration phase of jumping. It also proposes practical solutions for increasing the energy efficiency of jumping robots. A dynamic analysis is conducted on a multibody system comprised of rotational links, which is experimentally validated using a physical demonstrator. The analysis reveals that inefficient energy conversion is attributed to inertial effects caused by rotational and unsprung masses. Since these masses cannot be entirely eliminated from a physical linkage, a practical approach to improving energy efficiency involves structural redesign to reduce structural mass and moments of inertia while maintaining compliance with structural strength and stiffness requirements.

## 1. Introduction

Spring-driven jumping robots use a motor to store elastic energy in a spring, and then release this energy to propel the system [1,2] (Fig. 1). For an equivalent peak force and characteristic length, springs can generate greater output power and do more work over the system stroke length than a standalone motor [1,2]. This technique is known as *power amplification* and has been widely used in jumping animals, such as fleas [3,4] and locusts [5–7].

Initially developed for planetary exploration [8–10], jumping robots have been developed with numerous combinations of linkage and springs for applications in hazardous conditions, including disaster rescue [11,12] and surveillance [13,14]. The design trends have evolved from the initial prismatic mechanisms [10,15] to elastic cages [16–19], and then to the most recent biomimetic systems [20–23]. The highest jumping previous example combines an elastic cage with multiple translational springs and has been shown to jump up to 33 m high, which is equivalent to 110 times its own size [1].

Generally, the primary objective in designing spring-driven jumping robots is to achieve high *mechanical-kinetic energy efficiency* [24–27]. This involves having high *mechanical-elastic* efficiency in transferring energy from a stored onboard source via a motor to a spring during the spring-charging phase. It also requires high *elastic-kinetic* efficiency when transferring the spring elastic energy to kinetic energy as the robot accelerates during the acceleration phase. This paper focuses on the latter of these two phases.

\* Corresponding author.

E-mail address: [kwokcheungjohn.lo@manchester.ac.uk](mailto:kwokcheungjohn.lo@manchester.ac.uk) (J. Lo).<https://doi.org/10.1016/j.mechmachtheory.2024.105688>

Received 14 January 2024; Received in revised form 10 May 2024; Accepted 13 May 2024

Available online 21 May 2024

0094-114X/© 2024 The Author(s). Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

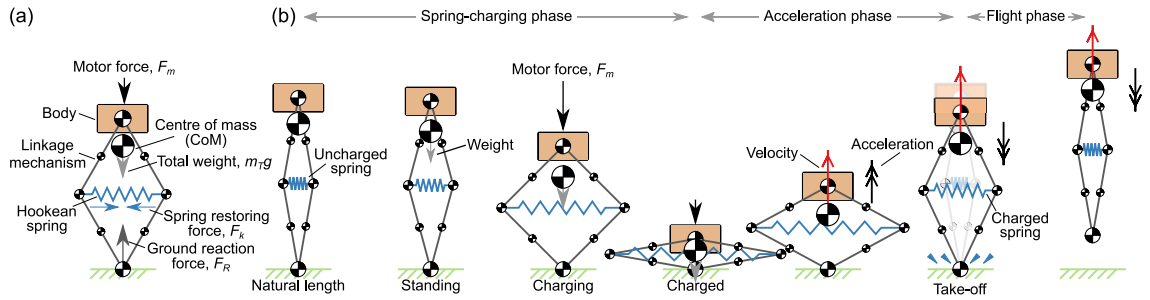


Fig. 1. An example of (a) a nonlinear spring-driven jumping robot with a rotational linkage mechanism that exhibits a nonlinear force-length relationship (e.g. [28]) and (b) its entire jumping process.

The elastic-kinetic energy conversion efficiency in spring-driven jumping robots was first explored in detail by [10] while designing a prismatic jumper for planetary exploration propelled by a linear spring (obeying Hooke’s law). A critical issue cited was that during the acceleration phase the robot foot disengaged from the ground before the leg was fully extended [28]. This resulted in the robot taking off prematurely with only 20% of the stored elastic potential energy being converted to kinetic energy (termed *premature take-off*). Hence, the robot did not reach the jump height predicted by the models, which assumed 100% elastic-kinetic conversion efficiency. The group attributed this premature take-off to spring surge [28] – a dynamic effect where the spring natural frequency is excited by the acceleration of the robot [29] – but no specific evidence was provided of this phenomenon. The analysis in Section 2.2 of this work will directly address the problem of premature take-off, and provide evidence that it can be caused by the centripetal force acting on the rotational bodies of the system, in addition to the spring surge hypothesised in [28].

A follow-on study proposed an alternative closed-chain linkage with a linear spring (hereafter referred to as *spring-linkage*, Fig. 1) to mitigate premature take-off in spring-driven systems [28]. The closed-chain linkage exhibited a nonlinear force-displacement relationship when loaded and had higher mechanical-elastic energy conversion efficiency compared to a linear spring [30,31]. The authors attributed the improved jump height in [28] to the nonlinearity of the force profile that allowed more energy to be transferred at the early stage of the jump and less at the end. The authors argued that this energy release profile would reduce the impact of premature take-off on the elastic-kinetic conversion efficiency. However, they did not consider that the greater jump height achieved by the spring-linkage may simply be due to the greater elastic energy storage compared to the previous linear spring system.


The significance of the spring-linkage design proposed in [28] is that it sparked the development of a whole class of similar closed-chained spring-linkage mechanisms [14,32–42]; this topology has since become the most prevalent in jumping robot designs. Several mechanisms have demonstrated improvements in the mechanical-elastic energy transfer efficiency over the original design [28] by using different types and arrangements of elastic elements [1,16,30,31,43–48]. However, the spring arrangement does not influence the premature take-off: all previous spring-driven robots have had premature take-offs. This is important as premature take-off limits the overall mechanical-kinetic energy conversion.

The research purpose of this paper is to investigate the causes of premature take-off and the energy efficiency of spring-driven jumping robots. This will be achieved through the use of simple mechanics models to provide a systematic and transparent analysis. The findings from these models will then be applied to more complex systems to offer practical engineering solutions to enhance energy conversion efficiency. The main contribution of this paper is the identification of the causes of premature take-off, attributed to the centripetal force acting on the rotational mass, and the inefficient energy conversion, attributed to the inertial effects caused by the rotational and unsprung masses.

## 2. Background theory of take-offs in spring-driven jumping systems

This work classifies the take-offs of a spring-driven system into three categories: (1) *idealised take-off*, where at take off the spring is at its natural length and all stored elastic potential energy has been fully released; (2) *premature take-off*, where at take off the spring length is less than the natural length and so still stores elastic potential energy; (3) *delayed take-off*, where at take off the spring length is greater than its natural length and so still stores elastic potential energy. Premature and delayed take-offs are undesirable as the residual elastic energy in the spring lowers the elastic-kinetic energy conversion efficiency and overall mechanical-kinetic conversion efficiency.

This section will illustrate the cause of the three take-off categories in spring-driven jumpers attributed to the inertial effect using two simple dynamic models: a prismatic multibody system driven by a translational spring (Section 2.1), and a rotational rigid body driven by a rotational spring (Section 2.2). These are conceptually the simplest models explaining the jumping dynamics that still apply to more complicated mechanical systems.

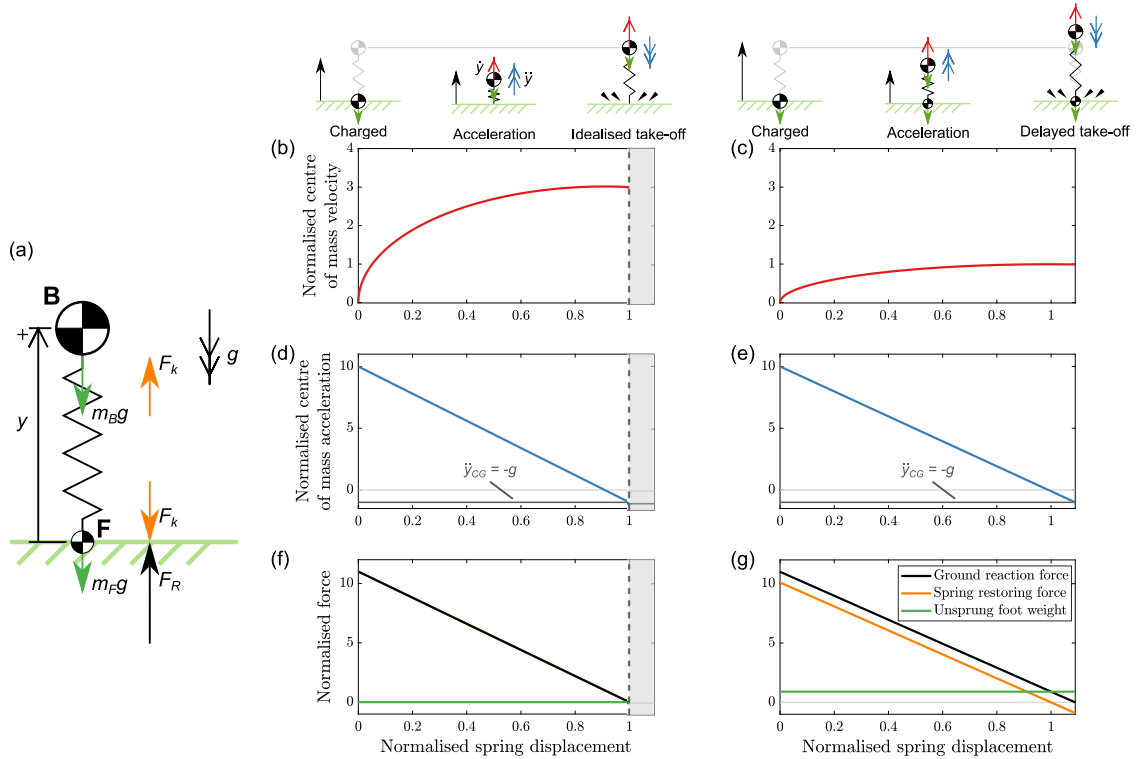

**Fig. 2.** (a) A prismatic jumping model driven by a massless linear spring in the standing posture. (b,c) The velocity and (d,e) acceleration of the centre of mass and (f,g) ground reaction force of the prismatic model (a) with two different body mass fractions: 1 (b,d,f) and 0.1 (c,e,g), both at a given force-to-weight ratio of 10. Without the unsprung mass (b) will take off as the spring returns to its natural length and, thus, achieves an idealised take-off. With an unsprung mass at the foot (c) undergoes a delayed take-off. Note that the greyed area is the *inflight phase* after the model takes off, which is out of the scope of this study. The spring displacement is normalised by the natural spring length as  $y/d$ ; the velocity of the centre of mass is normalised by the gravitational acceleration and characteristic length as,  $\dot{y}_{CG}/\sqrt{gd}$ ; the acceleration of the centre of mass is  $\ddot{y}_{CG}/g$ . The force is normalised by the peak spring charging force,  $F/F_{max}$ .

### 2.1. Prismatic linkage jumping systems

The mass spring system depicted in Fig. 2 is the simplest dynamic system that can be used to illustrate delayed take-off. The jumping dynamics of a linear (Hookean) spring-driven prismatic jumping system have been previously examined in [49]; this work extends the original analysis by studying the influence of the unsprung mass on the dynamics and the energy efficiency. The prismatic jumping model is modelled as a lumped sprung body mass (Fig. 2a, point B) via a massless translational linear spring (Fig. 2a). The spring has a stiffness,  $k$ , and a natural length,  $d$ , which is also defined as the characteristic length of this model. As the mechanical interface between the model and the ground, take-off is defined as the time when the foot loses contact with the ground. The system kinematics are captured through the body displacement,  $y$ , and the displacement of the system centre of mass,  $y_{CG}$ ; note that  $y_{CG} = [m_B/(m_B + m_F)]y$ , where  $m_B$  is the mass of the body and  $m_F$  is the mass of the foot. The *body-mass fraction* is the ratio of the body mass to the total system mass,  $m_B/m_T$ , where  $m_T = m_B + m_F$ . When the body mass fraction equals zero, all the system mass is located at the unsprung foot and there is zero sprung mass. Conversely, if the body mass fraction equals one, the system has zero foot mass and is the same as the ideal prismatic model presented in [49].

The jumping process begins from the standing posture where the spring is already displaced from its natural length due to the body weight,  $m_B g$  (Fig. 2a). The motor force,  $F_m(y)$ , does work on the spring until the force reaches the peak force,  $F_{max}$  and the spring is defined as being at the *charged* state, where  $y = y_{CG} = 0$ . The *force-to-weight ratio* is defined as the ratio of the peak force to the total system weight,  $\alpha = F_{max}/m_T g$ . During this process, the work done by the motor force is stored as elastic potential energy in the linear spring as,  $EPE = \frac{1}{2}kd^2 = \frac{1}{2}(F_{max} + m_B g)d$ . Note that the body weight contributes to the stored elastic energy, but the foot weight does not. When the motor force is removed (which could be achieved mechanically by using a latch) at the beginning of the acceleration phase, the elastic potential energy is transferred to kinetic energy and the mass accelerates in the  $+y$  direction. The equation of motion of the body as it accelerates is,

$$F_k(y) - m_B g = k(d - y) - m_B g = m_B \ddot{y}, \tag{1}$$

where  $F_k$  is the spring restoring force. The solutions of Eq. (1) are  $y = \frac{kd - m_B g}{k} [1 - \cos(\sqrt{\frac{k}{m_B}} t)]$  for the body displacement,  $\dot{y} = \frac{kd - m_B g}{\sqrt{km_B}} \sin(\sqrt{\frac{k}{m_B}} t)$  for body velocity and  $\ddot{y} = \frac{kd - m_B g}{m_B} \cos(\sqrt{\frac{k}{m_B}} t)$  for body acceleration. As shown in Fig. 2a, the ground reaction

force acting on the foot is the sum of the spring restoring force and the unsprung weight,

$$F_R = F_k(y) + m_F g = k(d - y) + m_F g = m_T \ddot{y}_{CG} + m_T g, \quad (2)$$

where  $\ddot{y}_{CG} = \frac{m_B}{m_T} \ddot{y}$ , is the acceleration of the centre of mass of the system. Take-off occurs when the ground reaction force equals zero. Hence, from Eq. (2), the body displacement at take-off,  $y_{to}$ , can be expressed as,

$$y_{to} = d + \frac{m_F g}{k}; \quad (3)$$

the take-off acceleration of the centre of mass is,  $\ddot{y}_{CG,to} = -g$  and; the take-off acceleration of the body is,  $\ddot{y}_{to} = -\frac{m_T}{m_B} g$ . By substituting this to the solution for the acceleration of the body, the time of the take-off can be expressed as,  $t_{to} = \sqrt{\frac{m_B}{k}} \cos^{-1} \left( \frac{-m_T g}{m_B - kd} \right)$ .

Subsequently, by substituting the take-off time into the solution for the velocity of the body, the take-off velocity of the body is,  $\dot{y}_{to} = \sqrt{\frac{kd(kd - 2m_B g) - m_F g^2(2m_B - m_F)}{k m_B}}$ ; the take-off velocity of the centre of mass is

$$\dot{y}_{CG,to} = \frac{m_B}{m_T} \dot{y}_{to} = \frac{1}{m_T} \sqrt{\frac{m_B}{k} [kd(kd - 2m_B g) - m_F g^2(2m_B - m_F)]}. \quad (4)$$

The elastic–kinetic energy conversion efficiency,  $\epsilon$ , is explicitly defined here as the ratio of the vertical take-off kinetic energy of the centre of mass,  $KE_{y,CG,to}$ , to the initial elastic potential energy stored in the spring,  $EPE_{ini}$ , as,

$$\epsilon = \frac{KE_{y,CG,to}}{EPE_{ini}} = \frac{m_T (\dot{y}_{CG,to})^2}{kd^2} = \frac{m_B}{m_T k^2 d^2} [kd(kd - 2m_B g) - m_F g^2(2m_B - m_F)]. \quad (5)$$

For the given prismatic model, the elastic–kinetic energy efficiency is maximised when the unsprung mass is zero. However, it is noteworthy that in any spring-driven jumping system operating under nonzero gravitational acceleration, the elastic–kinetic energy conversion approaches to, but never equals, one. This is because part of the energy must be converted into gravitational potential gained by the body before take-off.

Fig. 2 shows examples of the jumping dynamics during the acceleration phase of the prismatic model. The results are presented for two body mass fractions: 1 (Fig. 2b,d,f) and 0.1 (Fig. 2c,e,h), for a given characteristic length and force-to-weight ratio. As the spring is released, it applies a positive force to the system mass, causing the body mass to displace and the velocity of the centre of mass to increase (Fig. 2b,c). Acceleration of the centre of mass decreases proportionally with the spring displacement, as the spring is Hookean. Take-off occurs when the ground reaction force equals zero and the acceleration of the centre of mass equals  $-g$  (Fig. 2d,e).

With zero unsprung mass (Fig. 2b,d,f or in [49]) or zero gravitational acceleration ( $g = 0$ ), an idealised take-off is realised as given from Eq. (3). Here, the system takes off when the spring length is equal to its natural length. The stored elastic potential energy is fully released from the spring before take-off; part of it is converted into the kinetic energy of the centre of mass, while the remainder is transformed into the gravitational potential energy of the centre of mass.

With nonzero unsprung mass (e.g. Fig. 2c,e,g), the system undergoes delayed take-off as the spring is extended beyond its natural length at take-off. At take-off the spring applies a force equal to but opposite the unsprung weight (Fig. 2g). As a result, the system takes off with nonzero residual elastic energy remaining in the spring, leading to a reduced centre of mass velocity compared to the zero unsprung mass model. Delayed take-off is undesirable as it reduces the elastic–kinetic energy conversion efficiency and take-off velocity of the centre of mass. It is exacerbated by the increase in unsprung mass as body mass fraction decreases (Eq. (3)). After take-off this residual elastic energy is exchanged with the kinetic energy of the masses, causing them to oscillate relative to the system’s centre of mass, although this does not influence the jump height of the centre of mass. The findings of delayed take-off also apply to forward jumping. Here, a forward jump is defined as a case where the acceleration vector of the system centre of mass has a component that is perpendicular to the local gravity vector. The delayed take-off condition for vertical jumping was shown in Eq. (2). The equivalent condition for forward jumping is shown in the supplementary material; in short, the inclination angle of a forward jump resolves the vertical component of spring force, which reduces the effective spring length contributing to vertical displacement at take-off compared to a vertical jump. Forward jumping systems also experience delayed take-off when the unsprung mass is nonzero and the gravitational acceleration is nonzero, as the spring must be extended beyond its natural length (Eq. S6 in supplementary material).

In practice, all physical prismatic systems must have a nonzero unsprung interface (e.g. foot) between the mechanism and the ground. Therefore, it can be concluded that no physical prismatic spring-driven systems can achieve an ideal take-off. It is noted that this finding also applies to spring-driven multibody prismatic systems with multiple degrees of freedom. This is because adding additional links introduces spring force terms to the take-off condition equation, but delayed take-off still occurs due to the nonzero unsprung foot mass and nonzero gravitational acceleration.

Finally, it should be highlighted that for a premature take-off to occur, the ground reaction force is zero while the spring length is less than its natural length. This condition cannot be met in this linear spring model assumed here. However, it is important to note that this abstracted model does not capture the other mechanical properties of the physical system (e.g., spring inertia and structural damping). These technological factors, particularly the spring surge hypothesised in [28], remain potential sources for inducing premature take-off. Alternatively, Section 2.2 will show that a spring-driven system with a rotational body can undergo premature take-off.

## 2.2. Rotational linkage jumping systems

A single-degree-of-freedom linkage with a rotational joint can demonstrate premature, idealised, and delayed take-off. (Fig. 3). These take-off conditions are determined by the ratio of gravitational to centripetal forces.

Inspired by [50] the rotational jumping model is a massless rod with a length,  $d$ , and a point mass,  $m_B$ , at one end (Fig. 3a). The other end of the rod is connected to the ground via a revolute joint and a massless linear (Hookean) rotational spring with a stiffness,  $k_r$ , and a natural spring angle,  $\theta_{ini}$ . There is no unsprung mass or unsprung inertia in this example model. The kinematics of this model is captured by the rotational displacement of the body,  $\theta$ , measured from the ground plane.  $y$  is the vertical displacement of the body measured from the ground and is collinear but opposite to gravity and is derived as  $y = d \sin \theta$ ;  $x$  is the horizontal displacement of the body measured from the ground contact point F and is derived as  $x = d \cos \theta$ .

The jumping process begins at the standing posture where the rotational spring has already been compressed by the weight of the point mass,  $m_B g$  (Fig. 3c). A spring charging torque,  $\tau_c$ , is applied to the point mass to charge the rotational spring. The compression is stopped when the spring is fully charged at  $\theta = 0^\circ$ , where the rod is collinear with the  $x$ -axis; this state is defined as a *charged*. The total elastic energy stored in the spring is  $\frac{1}{2} k_r (\theta_{ini})^2$ . Once the spring-charging torque is removed, the rod accelerates in  $+\theta$  direction. The equation of motion of the system is,

$$m_B d \ddot{\theta} = \frac{\tau_k}{d} - m_B g \cos \theta, \quad (6)$$

where  $\tau_k$  is the spring restoring torque and  $\tau_k = k_r (\theta_{ini} - \theta)$ . Note that as  $\theta$  tends to zero, Eq. (6) becomes equivalent to Eq. (1). The tension,  $T$ , exerted on the rod is the sum of the gravitational load and the centripetal force,  $F_{cen}$ , as follows,

$$T = m_B g \sin \theta - F_{cen} = m_B g \sin \theta - m_B d \dot{\theta}^2. \quad (7)$$

The vertical ground reaction force acting on the bottom end of the rod,  $F_R$ , is the sum of the vertical component of the spring restoring torque,  $\frac{\tau_k}{d} \cos \theta$ , and the vertical component of the rod tension,  $T \sin \theta$ , which is expressed as the weight component,  $m_B g \sin^2 \theta$ , minus the vertical component of the centripetal force,  $m_B d \dot{\theta}^2 \sin \theta$ ,

$$F_R = \frac{\tau_k}{d} \cos \theta + T \sin \theta = \frac{\tau_k}{d} \cos \theta + m_B g \sin^2 \theta - m_B d \dot{\theta}^2 \sin \theta. \quad (8)$$


Take-off occurs when  $F_R = 0$  and can be realised if all of the three force components equal zero, or if they are nonzero and cancel each other.

Fig. 3d-i shows examples of the jumping dynamics of the rotational model using different spring stiffness values to cause different take-off conditions. The normalised spring stiffness is the rotational spring stiffness normalised by the system characteristic length and weight as  $k_r/mgd$ . With a normalised rotational spring stiffness of 4.5, the model undergoes a delayed take-off (Fig. 3d,g); a normalised value of 5.5 results in an idealised take-off (Fig. 3e,h), while a value of 10 leads to premature take-off (Fig. 3f,i). These three distinct dynamic behaviours can occur for any jumping system comprised of rotational links.

These take-off conditions can be explained by examining the three force components acting on the ground (Fig. 3g-i). Throughout the acceleration phase, the spring restoring torque decreases and the rod angle increases, which both cause the first term on the right-hand side of Eq. (8),  $\frac{\tau_k}{d} \cos \theta$ , to decrease. But simultaneously, the spring torque accelerates the point mass and, in combination with the rising rod angle, causes an increase in the gravitational force component,  $m_B g \sin^2 \theta$ , and the centripetal force component,  $m_B d \dot{\theta}^2 \sin \theta$ , which are denoted as the second and third terms on the right-hand side of Eq. (8).

The restoring torque is proportional to the spring stiffness, whereas the centripetal force is proportional to the angular velocity squared (Eq. (8)). As the spring stiffness increases the restoring torque component increases, but the angular velocity and centripetal force component increase by a greater amount (moving from (d) to (e) to (f) and from (g) to (h) to (i) in Fig. 3). Therefore, as the spring stiffness increases, the centripetal force term cancels out the torque term at a lower displacement. This causes the take-off to occur at a lower displacement. The premature take-off is evident from the reduction in the take-off angle compared to the natural spring angle. This dynamic event is undesirable in a spring-driven jumping system as it decreases the elastic-kinetic energy efficiency. However, it is noteworthy that even though the premature take-off is exacerbated with the increased normalised spring stiffness, the increased spring restoring torque increases the angular take-off velocity of the rotational system. This implies that despite the decrease in elastic-kinetic energy efficiency due to increased spring torque, the system can achieve a greater jump height or distance as the take-off velocity increases.

In practice, a physical multibody system may involve multiple rotational masses with multiple degrees of freedom. Adding additional links introduces additional inertial force terms to the take-off condition equation, but the take-off condition is still dictated by the relationship between gravitational, inertial, centripetal, and spring restoring forces, as described in this section and Section 3.2. To attain an idealised take-off, the sum of inertial and gravitational force components must be equal to the centripetal force components at the moment when the ground reaction force diminishes to zero. Section 6.2 will show that the premature take-off is exacerbated not only by the increasing spring torque but also by a higher proportion of rotational masses within the multibody system.

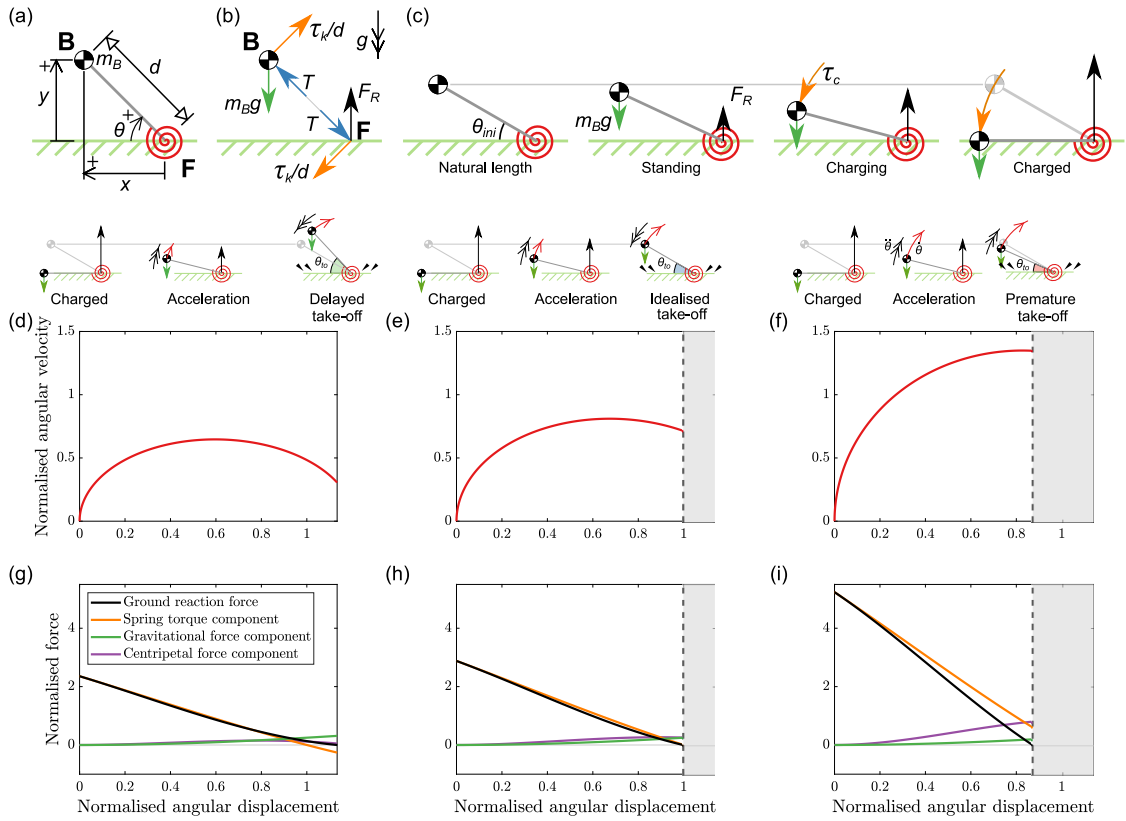

**Fig. 3.** (a) An inverted baton model driven by a massless rotational spring, and (b) its free-body diagram during the acceleration phase. (c) The spring-charging phase of the model with a natural angle of  $30^\circ$ . (d,e,f) The angular velocity and (g,h,i) the ground reaction force of the rotational model as a function of normalised angular displacement. The model in (d-i) has three different normalised rotational spring stiffness,  $k_r/mgd$ : (d,g) 4.5, (e,h) 5.5, (f,i) 10, all at a given natural angle of  $30^\circ$ . Note that the given natural spring angle is selected arbitrarily. For a given normalised rotational spring stiffness, an increase in natural spring angle exacerbates the premature take-off. This is because an increase in the natural spring angle increases the spring restoring torque, which increases the centripetal force and subsequently causes more premature take-off. The greyed areas in (e-f) and (h-i) are the *inflight phase* after the model takes off, which is out of the scope of this study. The angular displacement is normalised by the natural spring angle,  $\theta/\theta_{ni}$  and the angular velocity is normalised by the gravitational acceleration and the characteristic length,  $\dot{\theta} = \sqrt{d/g}$ ; the force is normalised by the weight of the rotational system,  $F/m_B g$ .

### 3. Jumping dynamics of a multibody system

The previous section studied the jumping dynamics of the abstracted prismatic and rotational models powered by springs. However, physical jumping systems consist of linkages with multiple segments and joints, leading to more complex dynamics. This section will develop a multibody dynamic model to explore the coupled dynamic effects and identify the inefficient energy source attributed to the inertial effect. A case study will be conducted using a rhomboidal linkage with rotational springs (rotational spring-linkage), which serves as a representative example of a generalised spring-driven jumping system. A physical experiment will then be used to validate the dynamic model. Sections 6.1 and 6.2 will present the findings with solutions to increase the elastic-kinetic energy conversion efficiency in practical spring-driven jumping robots.

#### 3.1. Model kinematics

A multibody representation of the rotational spring-linkage system is defined using four rigid segments connected by revolute joints in Fig. 4. The rhomboidal linkage is one of the most common topologies in jumping robots and has a single translational degree of freedom (DoF) [24–27]. This mechanism is chosen here as it is simple enough to provide interpretable results in multibody dynamics, while also maintaining adequate detail to represent existing jumping robot designs. Note that the asymmetric or chained mechanism is not chosen here as the asymmetric mass and inertia distribution, or for dynamics where the ground reaction force is not collinear with the weight factor, the centre of mass of such a system would exhibit rotational dynamics. This holds true for both vertical and forward jumps. These dynamics are highly geometry-specific, making them challenging to generalise. Therefore, they are not included within the scope of the present study, as our focus was on maintaining a specific and focused scope.

Point masses  $m_1$ ,  $m_4$ ,  $m_5$  and  $m_8$  are positioned at the revolute joints and represent the mass of the mechanical joints A, B, D and F including the mass of the rotational springs. Joint B represents the body, joint F represents the ground contact point of the

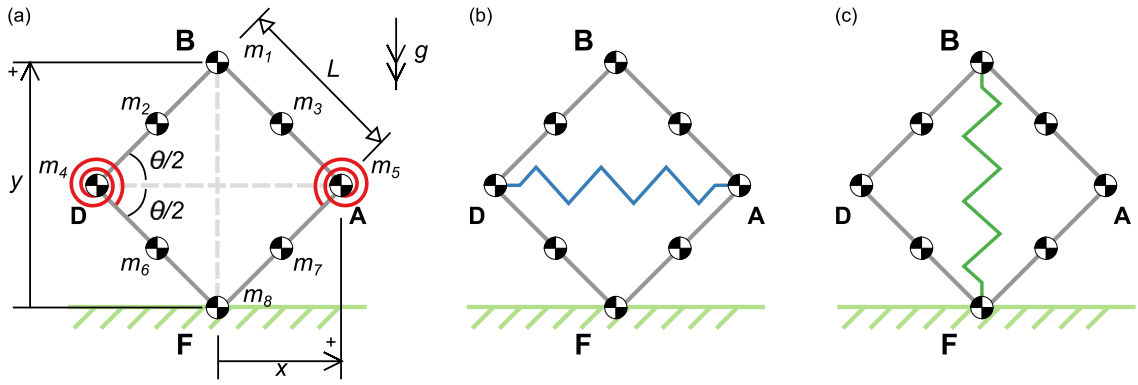


Fig. 4. Examples of multibody systems formed by the rhomboidal linkage with (a) rotational springs, (b) horizontally placed translational spring and (c) vertically placed translational spring [30].

system (e.g. foot), and joints A and D are the knee joints. The angle between the segments BA and FA,  $\theta$ , is defined as the *knee angle* and is equal to the angle of the rotational spring when this spring type is used. The rigid segments are modelled as thin uniform beams of mass  $m_2, m_3, m_6$  and  $m_7$  have equal length,  $L$ ; note that  $L = d/2$ , where  $d$  is the characteristic length of the system. The centre of mass of each beam is at the geometric centre, and the moment of inertia of each beam about its centre of mass is given by  $I_i = m_i L^2/12$ . It is important to include both the joint masses and the segment rotational inertia within the model as these will both be shown to contribute to the take-off dynamics.  $y$  is the vertical displacement of joint B measured from joint F and is aligned with, but opposite to, the local acceleration due to gravity;  $x$  is the horizontal displacement measured from the initial position of joints B and F, and is perpendicular to  $y$ . The translational position, velocity and acceleration of joint B are given by,

$$x = L \cos \frac{\theta}{2}, \dot{x} = -\frac{L\dot{\theta}}{2} \sin \frac{\theta}{2}, \ddot{x} = -\frac{L}{2}(\ddot{\theta} \sin \frac{\theta}{2} + \frac{\dot{\theta}^2}{2} \cos \frac{\theta}{2}); \quad (9)$$

$$y = 2L \sin \frac{\theta}{2}, \dot{y} = L\dot{\theta} \cos \frac{\theta}{2}, \ddot{y} = L(\ddot{\theta} \cos \frac{\theta}{2} - \frac{\dot{\theta}^2}{2} \sin \frac{\theta}{2}). \quad (10)$$

Note that this work describes the vertical motion of the model by the normalised body displacement, which is defined as the vertical displacement of the body normalised by the characteristic length of the linkage,  $\bar{y} = y/d$ .

### 3.2. Jumping dynamics

The dynamics of the system are analysed by the Lagrangian method given by,

$$\mathcal{L} = KE - PE, \quad (11)$$

$$\frac{\partial}{\partial t} \left( \frac{\partial \mathcal{L}}{\partial \dot{\theta}} \right) = \frac{\partial \mathcal{L}}{\partial \theta}, \quad (12)$$

where  $\mathcal{L}$  is the Lagrangian.  $KE$  is the total kinetic energy, which is the sum of the horizontal kinetic energy,  $KE_x$ , vertical kinetic energy  $KE_y$ , and rotational kinetic energy  $KE_r$ ,

$$KE = KE_x + KE_y + KE_r = \sum_{i=1}^8 \frac{1}{2} m_i (\dot{x}_i)^2 + \sum_{i=1}^8 \frac{1}{2} m_i (\dot{y}_i)^2 + \sum_{i=1}^8 \frac{1}{2} I_i (\dot{\theta}_i)^2, \quad (13)$$

where  $m_i$  is the mass of the  $i$ th component (joint or segment),  $x_i$  and  $y_i$  are the positions of the respective centres of mass. Note that in this class of 1-DoF system the centre of mass has zero horizontal and rotational kinetic energy. The total vertical kinetic energy is the sum of the vertical kinetic energy of the system centre of mass,  $KE_{y,CG}$ , and the vertical kinetic energy of the components relative to the centre of mass,  $KE_{y,relative}$ :

$$KE_y = KE_{y,CG} + KE_{y,relative} = \frac{1}{2} m_T (\dot{y}_{CG})^2 + \sum_{i=1}^8 \frac{1}{2} m_i (\dot{y}_i - \dot{y}_{CG})^2, \quad (14)$$

where  $m_T = \sum_{i=1}^8 m_i$  is the total mass of the system and the summation of the eight components includes the four revolute joints and the four segments.  $PE$  is the total potential energy, including the gravitational potential energy,  $GPE$ , and the elastic potential energy stored in the rotational springs,  $EPE$ :

$$PE = GPE + EPE = \sum_{i=1}^8 m_i g y_i + k_r (\theta_{mi} - \theta)^2, \quad (15)$$

where  $g$  is the gravitational acceleration,  $k_r$  is the rotational spring stiffness and  $\theta_{ini}$  is the natural angle of the rotational spring. By substituting Eqs. (13) and (15) into Eq. (11), the Lagrangian can be rewritten as,

$$\mathcal{L} = \frac{L^2 \dot{\theta}^2}{32} m_A \sin^2 \frac{\theta}{2} + \frac{L^2 \dot{\theta}^2}{32} m_B \cos^2 \frac{\theta}{2} + \frac{L^2 \dot{\theta}^2}{96} m_C - m_D \frac{gL}{2} \sin \frac{\theta}{2} - k_r (\theta_{ini} - \theta)^2, \quad (16)$$

where  $m_A = \sum_{i=2}^7 m_i + 3 \sum_{i=4}^5 m_i$ ,  $m_B = \sum_{i=1}^7 m_i + 3 \sum_{i=1}^5 m_i + 5 \sum_{i=1}^3 m_i + 7m_1$ ,  $m_C = \sum_{i=2}^7 m_i - \sum_{i=4}^5 m_i$ ,  $m_D = \sum_{i=1}^7 m_i + \sum_{i=1}^5 m_i + \sum_{i=1}^3 m_i + m_1$ . By substituting Eq. (16) into Eq. (12), the angular acceleration of the knee can be expressed as,

$$\ddot{\theta} = \frac{2k_r(\theta_{ini} - \theta) - \frac{L^2 \dot{\theta}^2}{64} \sin \theta (m_A - m_B) - \frac{m_D L g}{4} \cos \frac{\theta}{2}}{\frac{L^2}{16} (m_A \sin^2 \frac{\theta}{2} + m_B \cos^2 \frac{\theta}{2}) + \frac{L^2}{48} m_C}. \quad (17)$$

The vertical ground reaction force,  $F_R$ , acting on joint F is,

$$F_R = m_T g + m_T \ddot{y}_{CG} = \sum_{i=1}^8 m_i (g + \ddot{y}_i) = \sum_{i=1}^8 m_i g + \frac{m_D}{4} L \ddot{\theta} \cos \frac{\theta}{2} - \frac{m_D}{8} L \dot{\theta}^2 \sin \frac{\theta}{2}, \quad (18)$$

where  $\ddot{y}_{CG}$  is the vertical acceleration of the centre of mass of the entire system. As presented in Eq. (18), the ground reaction force is the sum of the total system weight,  $\sum_{i=1}^8 m_i g$ , and the inertial force component (which is embedded with the spring restoring torque as shown in Eq. (17)),  $\frac{m_D}{4} L \ddot{\theta} \cos \frac{\theta}{2}$ , minus the centripetal force component,  $\frac{m_D}{8} L \dot{\theta}^2 \sin \frac{\theta}{2}$ , similar to Eq. (8) given by the abstracted model in Section 2. Take-off occurs when  $F_R = 0$ , which means these three force components cancel each other. Note that when the rotational and unsprung masses are removed from the model ( $m_2, m_3, m_4, m_5, m_6, m_7, m_8 = 0$ ), the ground reaction force is expressed as  $F_R = \frac{2k(\theta_{in} - \theta)}{L \cos \frac{\theta}{2}}$ . When  $F_R = 0$ , the take-off knee angle must equal the natural angle of the rotational spring ( $\theta_{to} = \theta_{in}$ ). This implies

that the model achieves an idealised take-off. However, it is important to note that this extreme condition mathematically eliminates the segments and knee masses, which cannot be physically realised.

### 3.3. Take-offs and jump height

The jumping spring-linkage takes off when the ground reaction force equals zero ( $F_R = 0$ ) and the acceleration of the centre of mass is equal to  $-g$ . This condition can be expressed by substituting Eqs. (10) and (17) into Eq. (18); the stiffness of the rotational spring is obtained by the given peak spring-charging force,  $F_{max}$ , natural spring angle and the charged angle,  $\theta_{end}$ , using Eq. (14) in [30], as follows,

$$\frac{4m_T g}{m_D} = \frac{[\alpha m_T g \cos \frac{\theta_{end}}{2} (\frac{\theta_{ini} - \theta_{to}}{\theta_{ini} - \theta_{end}}) - \frac{m_D g}{4} \cos \frac{\theta_{to}}{2}] \cos \frac{\theta_{to}}{2} - \frac{L(\dot{\theta}_{to})^2}{96} (3m_A + m_C) \sin \frac{\theta_{to}}{2}}{\frac{1}{16} (m_A \sin^2 \frac{\theta_{to}}{2} + m_B \cos^2 \frac{\theta_{to}}{2}) + \frac{1}{48} m_C}, \quad (19)$$

where  $\alpha = F_{max}/m_T g$  is the force-to-weight ratio,  $\theta_{to}$  is the take-off spring angle and  $\dot{\theta}_{to}$  is the take-off angular velocity.

Throughout the acceleration phase the total energy of the system remains constant and equal to the initial elastic potential energy stored in the spring so that,  $KE + PE = EPE_{ini} = k_r (\theta_{ini})^2$ . At take-off, the residual elastic potential energy and the kinetic energies of the components are generally regarded as the sources of inefficiency as they represent the portion of stored elastic potential energy that is not converted to gravitational potential energy in flight. Note that in practice, there are other inefficient energy sources that do not arise from the inertial effect but also decrease the elastic-kinetic energy conversion, such as structural damping, friction, and air resistance. The vertical take-off velocity of the centre of mass is,

$$\dot{y}_{CG,to} = \frac{\sum_{i=1}^8 m_i \dot{y}_{i,to}}{m_T} = \frac{m_D}{4m_T} \dot{y}, \quad (20)$$

where  $\dot{y}_{i,to}$  is the vertical take-off velocity of each mass. The jump height of this system,  $h$ , measures the maximum vertical displacement of the centre of mass from its displacement at take-off. By conservation of energy, it is derived from the take-off velocity of the centre mass,  $\dot{y}_{CG,to}$ , as,

$$h = \frac{1}{2g} (\dot{y}_{CG,to})^2. \quad (21)$$

This work compares the jump height of different scales of systems by normalised jump height,  $\bar{h}$ , which is defined as the ratio of the jump height to the characteristic length of the system as,

$$\bar{h} = h/d. \quad (22)$$

As an example in jumping robots, the hybrid spring-linkage jumper [1] uses a 0.3 m nonlinear spring-linkage to jump over 33 m high, which is equivalent to a normalised jump height of 110.

For reference, the theoretical normalised jump height upper bound is set by an idealised system (e.g. the prismatic model in Section 2.1 without unsprung mass) driven by an ideal constant force spring. Here, the force of the ideal spring would be independent of the spring displacement. During the spring-charging phase, the ideal spring would be charged by a constant force equal to the sum of the peak motor force and system weight,  $F_{max} + m_T g$ . Thus, it conceptually stores the maximum amount of elastic energy for a given mass, motor force and characteristic length. The jump height of this ideal system is derived from the stored elastic energy



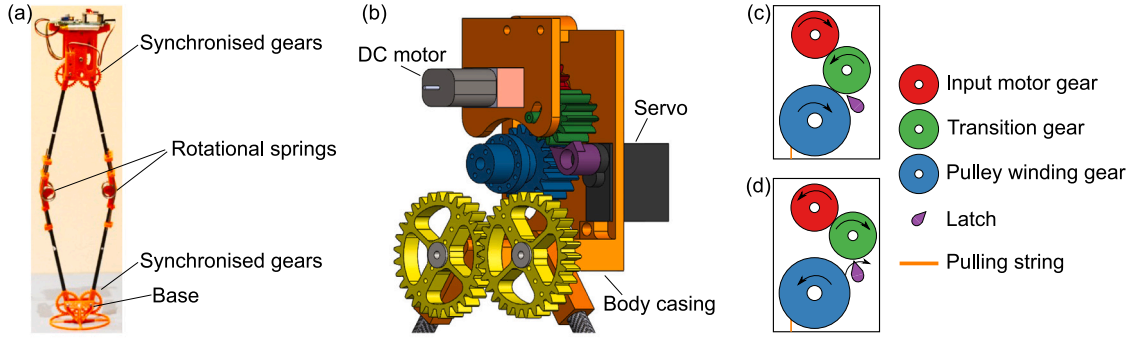


Fig. 5. (a) The experimental model and (b) the CAD model of the main body. Working schematic of the reduction gearbox with the active latch in (c) the spring-charging and (d) the acceleration phases.

by assuming the conservation of energy as,  $m_T g(h + d) = (F_{max} + m_T g)d$ , so that,  $h = F_{max} d / m_T g$ . The normalised jump height of the ideal spring-driven system is equal to the force-to-weight ratio as  $\tilde{h} = F_{max} / m_T g = \alpha$ . In contrast, the prismatic linear spring-driven model with zero unsprung mass (Section 2.1) can only store 50% energy of the ideal system so that  $h = \frac{d}{2} (\frac{F_{max}}{m_T g} - 1)$  and results in  $\tilde{h} = \frac{1}{2}(\alpha - 1)$ .

#### 4. Experimental model

An experiment is conducted to validate the acceleration dynamics predicted by the theoretical models. The experiment includes a self-contained jumping system with the spring-linkage arrangement used in the previous section. The system has onboard power, a control system that initiates spring charging, and an active latch to start the acceleration phase (Fig. 5a). The system can undertake multiple charging and jumping cycles.

The jumping system has a mass of 206 g and has a height of 40 cm. Table 1 lists the mass breakdown. The single degree of freedom is realised by the pairs of synchronised spur gears at joints B and F, inspired by [28], as shown in Fig. 5a.

The motor module comprises a three-stage reduction gearbox (1.5:1), a DC motor (6V, Pololu 1000:1) and a servo (Turnigy D56MG), as shown in Fig. 5b. The gearbox increases the torque output from the DC motor shaft, and connects the motor to a pulley to wind a tension string when charging the robot. The servo serves as a latch to actively release the charged springs. The maximum output torque and the string tensile force of this module are 0.37 N m and 60 N, respectively.

During the spring charging phase, the motor gear contacts the transmission gear which is engaged with the pulley winding gear to wind the string, as shown in Fig. 5c. To initiate the jump, the latch triggered by the servo displaces the transmission gear to disconnect the DC motor from the drivetrain, as shown in Fig. 5d. Without the spring holding force, the embedded springs can recoil freely and release the stored elastic energy, causing the leg to extend. Low friction bearings MF52ZZ are installed in each revolute joint and gearbox to minimise friction during the acceleration phase.


The system employs an Adafruit ESP32 microprocessor to remotely communicate and control the system with Bluetooth via a smartphone. The power system consists of a 3.7 V LiPo battery and a boost-regulator MT3608. The battery is selected to match its available discharging current with the maximum current draw from the DC motor. The regulator boosts the voltage for the 6 V DC motor and the servo.

The experimental model uses two pairs of rotational springs attached to its knee joints. Each rotational spring pair has a stiffness of  $0.7 \text{ N m rad}^{-1}$  and a natural spring angle of  $178^\circ$ . An experiment was conducted to validate the spring properties, as shown in [30]. The initial knee angle of the robot is  $178^\circ$ , aligning with the natural spring angle; there was no observable deflection caused by the system weight. In the experiment, the rotational springs are compressed down to  $25^\circ$ , where the links then contact one another. Therefore, the maximum energy that can be charged in the rotational springs is around 5 J. Note that these springs are selected so that only half of the available motor force from the motor module is needed to compress the system, providing a system safety factor of 2. Note that the required motor force is derived by applying the quasi-static equation from [30] with the given natural spring angle and leg length of the robot.

The prototype is initially placed on a horizontal surface in the standing posture. Both the spring charging and the acceleration phases are triggered remotely. The take-off kinematics were captured using a high-speed camera Phantom V310 at a frame rate of 1000 FPS. The in-flight trajectory is recorded using a GoPro Hero 6 at 120 FPS. The jumping kinematic data were obtained from the video using the automated pixel tracking software, *Tracker*, to capture the positions of the joints A,B,D and F and the centres of each link at time intervals of 1 ms.

**Table 1**  
The mass budget of the experimental model.

Dynamic model	Physical model	Mass (g)	Mass fraction
$m_1$	Motor	11.5	56%
	Gears	8	
	Latch	10	
	Body casing	31	
	Control unit	32	
	LiPo battery	18	
	Synchronised gears (upper)	5	
$m_2, m_3$	Upper legs	8.1	4%
$m_4, m_5$	Rotational springs	48	31%
	Joints	15.4	
$m_6, m_7$	Lower legs	8.1	4%
$m_8$	Synchronised gears (lower)	5	5%
	Base	5.5	
	<b>Total</b>	205.6	100%

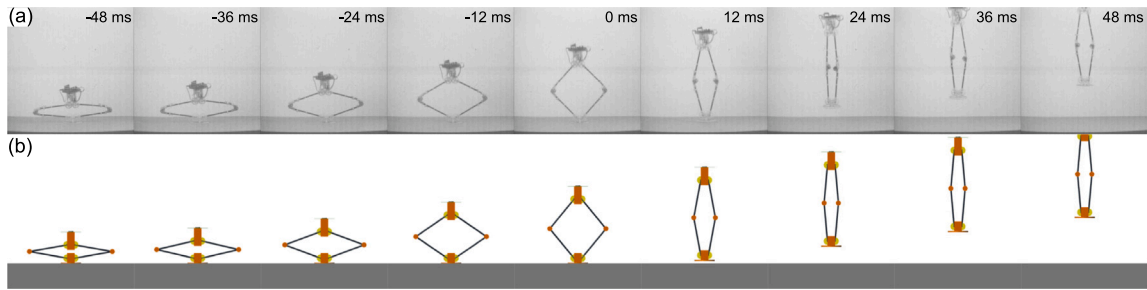

**Fig. 6.** (a) Take-off sequence of the prototype and (b) the Simscape model, starting from the charged posture and then accelerating to the take-off position before becoming airborne. The simulation time is the same as the experiment.

## 5. Numerical model

The dynamics model in Section 6.1 is used to predict the acceleration phase of the experimental model up to the time of take-off. It is also used in Sections 6.2 and 6.3 to simulate the acceleration phase of the conceptual models based on the experimental model that cannot be tested by experiment. The acceleration phase is modelled through a numerical solution to Eq. (17) using Matlab’s ODE45 solver with a maximum variable time step size of  $10^{-4}$  s. The model parameters are  $L = 0.15$  m,  $k_r = 0.7$  N m rad $^{-1}$ ,  $\theta_{ini} = 178^\circ$  and  $\theta_{end} = 25^\circ$ . The mass distribution of the dynamic model is shown in Table 1.

A second numerical multibody dynamics model is developed using the Matlab Simulink (Simscape Multibody toolbox library) to verify the results from the ODE45 solution. The toolbox simulates the system jumping and in-flight dynamics under gravitational forces, inertial forces and moments and the spring driving force and moments. The ground is as being fixed to the world frame. The contact force between the foot and the ground is modelled as a linear spring with a stiffness of  $10^8$  N m $^{-1}$ . The geometry of the multibody model is equal to that of the dynamic model in Table 1. The model has a single translational degree of freedom aligned with the gravitational vector and is realised by a prismatic joint connecting the body of the model to the ground. The simulation is computed using a fixed timestep solver (ODE14x) with a time step of  $10^{-5}$  s; further reduction in timestep yielded a change of less than 0.1% in all results.

## 6. Result and discussion

This section will first compare the results of the jump dynamics of the experiment and, the mathematical model given in Section 3 and the numerical model given in Section 5. It will then discuss the influence of the motor force and mass distribution on the take-off dynamics and the elastic–kinetic energy conversion efficiency of the multibody.

### 6.1. Experiment and simulation result of the experimental model

Fig. 6a illustrates the jumping sequence of the experimental model. The jump starts from the charged position, followed by the acceleration phase, eventually reaching the take-off state (at  $t = 0$  ms) and becoming airborne. Fig. 6b is a digital visualisation of the experiment using the Simulink model mentioned in Section 5; it gives identical results to the numerical model from Section 3, but is shown here as it also provides an illustration of the airborne phase.


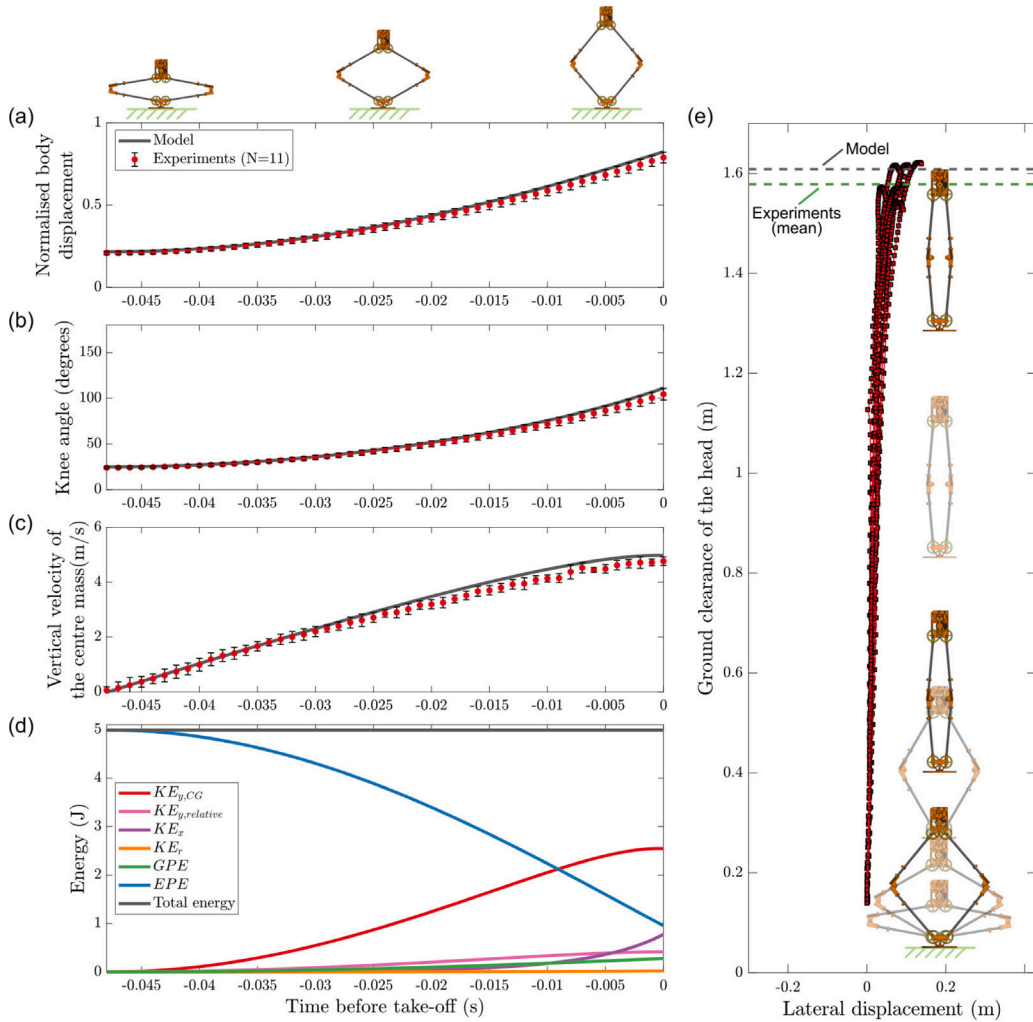


Fig. 7. Experimental and theoretical data of the system during a jump. (a)–(c) depict the kinematics up to the point of take-off measured experimentally and predicted by the numerical model: (a) The body displacement measured from the foot joint and normalised by the characteristic length,  $y/d$ , (b) the knee angle and (c) the velocity of the centre of mass. (d) Energy components of the system are obtained from the numerical model. (e) Experimental measurement of the jumping trajectory during take-off and flight, measured as the ground clearance of the top of the body; the mean value of the trajectory maximum ground clearance from each experiment is shown as the green dashed line, and the numerically simulated maximum ground clearance is shown as the black dashed line. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

Fig. 7a-c shows the experimental results from the 11 trials with the numerical result shown as the solid dark line. The initiation of the acceleration phase is defined here as when the centre of mass velocity is greater than  $0.5 \text{ m s}^{-1}$ . From the charged to take-off states the acceleration phase lasts around 0.05 s. The energy of the system is calculated from the numerical model, as shown in Fig. 7d. Fig. 7e shows the jumping trajectory of the prototype represented by its body displacement from the ground. The dashed grey line marks the prediction from the numerical model; the dashed green line marks the mean peak vertical displacement in the experiments.

The numerical model closely predicts the trends seen in the experiments in Fig. 7a-c. The experimental model was compressed to a knee angle of  $25 \pm 1^\circ$  with a normalised body displacement of  $0.21 \pm 0.01$  measured from the foot. Around 5 J of elastic potential energy was stored in the pair of rotational springs, as shown in Fig. 7d. The experimental model accelerated at over 10 g, and took off prematurely with a knee angle of  $104 \pm 4^\circ$ ; note that an idealised system would have a take-off knee angle equal the natural angle of the rotational spring of  $178^\circ$ . As explained in Section 2.2, the premature take-off was due to the centripetal force on the segments and knee joints. The vertical take-off velocity of the centre of mass is  $4.8 \pm 0.2 \text{ m s}^{-1}$ , which is 4.1% lower than the prediction of the numerical model. The elastic-kinetic energy conversion efficiency of the experiment is  $0.47 \pm 0.03$  (solid red line in Fig. 7d), 8.1% lower than the model. At the apex, the top of the body was measured as being  $1.58 \pm 0.03 \text{ m}$  from the ground, 1.9% lower than the prediction of the model. The difference between the experiment and the predictions is believed to be mainly attributed to the factors that are not captured in the model, including air resistance, structural damping and damping of the

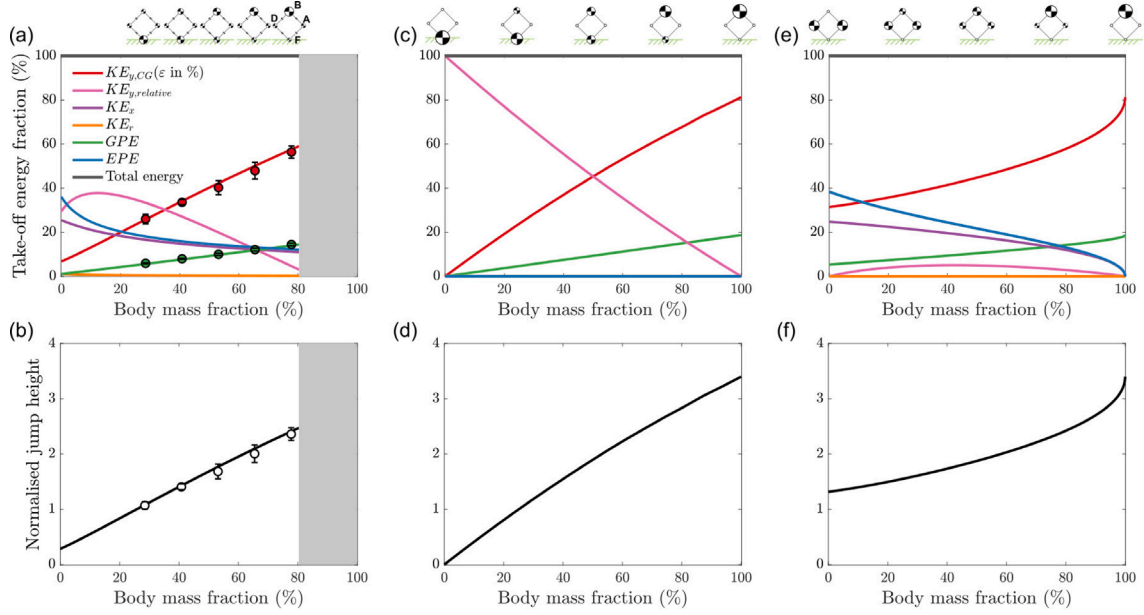

**Fig. 8.** The (a) take-off energy fraction and (b) the normalised jump height of the experimental and numerical results of simulated jumps of the modified system with the additional 200 g payload. (c,d) Numerical simulations of systems made of a massless linkage with concentrated mass at body and foot. (e,f) Numerical simulations of the system with concentrated mass at the body and knees. In (a,b), the greyed area is the unattainable region where the body mass fraction cannot be further increased due to the inherent weight of the segments and foot in the experimental model. For (c-f), the massless linkage system cannot be tested experimentally and the results are gained from the numerical model. Note that the take-off energy fraction is the energy components of the system at take-off normalised by the initial elastic energy stored in the rotational springs of the system; the body mass fraction is the proportion of the body mass to the total system mass. The jump height is the vertical displacement of the system centre of mass from take-off to apex calculated by  $h = \frac{1}{2g} (\dot{y}_{CG, to})^2$  and is normalised by the characteristic length,  $d$ . (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

physical substrate. In particular, the frictional loss between the joints and components is attributed to manufacturing quality and assembly accuracy, which can be addressed by adopting adequate measures (e.g. lubrication). However, it is noted that here, the undesirable premature take-off is induced by rotational inertia and cannot be eliminated by these technological approaches.

The total system energy is equal to the initial elastic potential energy charged in the rotational springs and remains unchanged throughout the acceleration phase (Fig. 7d). When the latch releases the springs, the stored elastic potential energy is converted into gravitational potential energy and kinetic energy as the linkage begins to extend and accelerate. The numerical model gives a breakdown of the transfer of energy into various sources, providing insight into sources of inefficiency (Fig. 7d). By the time of take-off 6% of the stored elastic energy has been converted to gravitational potential energy and 51% has been converted to the vertical kinetic energy of the centre of mass. The latter measure is typically the desirable quantity for a jumping robot as it defines the eventual jump height. The remaining 43% of initially stored elastic energy is not converted to useful work done on the system: 19% of the elastic potential energy remains in the spring as residual energy at the point of take-off, hence we define this as a premature take-off. Around 24% of the elastic energy is used to accelerate the individual segments relative to the overall system centre of mass: 16% is transferred to the horizontal motion of the segments, 8% to vertical motion, and less than 1% to rotational motion. In flight these energy components are observable as oscillations of the segments. In the experiments the oscillations decay due to structural and aerodynamic damping, and all components are seen to travel at approximately the same velocity relative to the Earth immediately prior to landing.

In the second experiment the effect of mass distribution on jump performance was explored by adding extra masses to the experimental model. 200 g additional mass was distributed between the body and foot of the robot. Fig. 8a-b show the variation in elastic-kinetic energy conversion efficiency and normalised jump height with body mass fraction for the physical experiments (red dots) and numerical models of the experiments (solid red line). As the body mass fraction increases, the energy efficiency and normalised jump height increase. For the given experiment the maximum attainable energy efficiency is up to 0.6 with a normalised jump height of 2.4 at around 78% body mass fraction, which is limited by the inherent weight of the segments and foot in the current design. The cause of this performance improvement will be explained in Section 6.2 using the numerical model introduced in Section 3.

### 6.2. The influence of the mass distribution and force-to-weight ratio on the energy efficiency

The numerical model in Section 3 can be used to assign point masses at locations in the system, which allows specific dynamic effects to be controlled to explore their influence on the system performance. Two theoretical models of a massless linkage system

were developed with concentrated masses at the body and foot joints (*body – foot* in Fig. 8c,d) and at body and knee joints (*body – knees* in Fig. 8e,f). The body mass fraction was adjusted by varying the mass between the two joints in each model. These conceptual systems have the same dimensions and total mass as the modified experimental model including the additional masses.

As the mass is distributed higher up the model the elastic–kinetic energy conversion efficiency,  $\epsilon$ , increases (Fig. 8). In the case where all mass is located at the body, the body mass fraction is 100% (*body-only case*), and the inertias of the segments, knee joints and the unsprung foot are mathematically removed. The energy efficiency rises to 0.8 in this case. Here, all of the spring energy is converted to gravitational potential energy and kinetic energy of the system centre of mass prior to take-off. This is the maximum theoretically achievable elastic–kinetic energy efficiency and normalised jump height for this force-to-weight ratio and characteristic length. Note that the elastic–kinetic energy efficiency is less than 1 due to a portion of the elastic energy being converted to gravitational potential energy before take-off. The elastic–kinetic energy efficiency could be increased further by decreasing the gravitational potential energy through decreased system weight or characteristic length.


The body-foot model (Fig. 8c,d) is useful as it removes centripetal forces, horizontal inertial forces, and rotational inertia from the system. This simplifies the energy breakdown in Fig. 8a. In the body-foot model, the most extreme case is when the body mass fraction equals 0, so the system centre of mass is located at the unsprung static foot. The spring restoring force does no work on the centre of mass as the massless leg extends, so it never takes off. As the body mass fraction increases the elastic–kinetic energy conversion efficiency and normalised jump height increase. This is because the centre of mass is shifted towards the body, and the spring can now do work on the centre of mass. The remaining energy is transferred to the relative motion of the body and foot with respect to the centre of mass and the residual elastic potential energy, as shown in Fig. 8c. Like the prismatic model in Section 2.1, premature take-off does not occur as the segments and knee joints are massless and have no centripetal force acting on them. Instead, delayed take-off occurs due to the unsprung foot mass. This undesirable dynamic phenomenon could be improved by increasing the body mass fraction. With a higher sprung mass proportion, a lower spring force is needed to pull the static unsprung foot off the ground at take-off. This results in lower residual elastic energy in the spring at take-off, and a higher elastic–kinetic energy efficiency and normalised jump height.

The body-knees model (Fig. 8e,f) is used to introduce centripetal effects into the model while removing the segment and unsprung foot masses. In the body-knees models, the presence of the knee mass prevents an idealised take-off. As the leg extends during the acceleration phase, the centripetal force on the knee masses has a vertical component acting on the ground (the third term on the right-hand side of Eq. (18)) that opposes the system weight and the inertial force (the first and second terms on the right-hand side of Eq. (18)). As the spring discharges and the rotational inertia accelerates, the centripetal force increases with the angular velocity squared. When the vertical component of the centripetal force cancels out the inertial force component and weight, the ground reaction force vanishes and the model takes off prematurely. The centripetal force on the knee is the greatest for systems with a body mass fraction equal to zero. In this extreme case, the model takes off the most prematurely with the greatest proportion of residual elastic energy. Increasing the body mass fraction reduces the relative mass and the centripetal force on the knee, and the model has a longer acceleration time to allow the spring to do more work on the centre of mass. Therefore, the vertical velocity of the centre of mass increases with the body mass fraction, and so do the elastic–kinetic energy conversion efficiency and jump height.

By moving the mass towards the body, both conceptual models show a significant improvement in their jumping performance. These numerical analyses identify the mass distribution of the system as one of the keys to determining the take-off condition and jumping dynamics.

Apart from the mass distribution, another intuitive approach to increasing the elastic–kinetic energy conversion efficiency might be to increase the elastic potential energy stored within the spring. This can be physically achieved using a higher stiffness spring and a higher force motor, which increases the force-to-weight ratio of the system. Fig. 9 illustrates the effects of varying force-to-weight ratio and mass distribution on the experimental model, with other previous jumping robots included for reference. Neglecting the increase in spring and motor mass that would be required to realise this, our numerical model predicts that the elastic–kinetic energy conversion efficiency of the experimental model can only be increased from its current value of around 0.5 to a maximum of around 0.58 (Fig. 9a). Including the increases in spring and motor mass would result in an even smaller change in energy efficiency. And this finding holds true for the previous example robots in Fig. 9. Increasing the force-to-weight ratio beyond the value typically used in practical jumping robots is not an effective approach to increasing the elastic–kinetic energy conversion.

A more effective approach remains to redistribute mass towards the body of the robot through strategic positioning of mass components or structural optimisation. Using the experimental model as an example, redistributing more mass towards the top of the robot increases the elastic–kinetic energy efficiency (e.g. from (a) to (b) in Fig. 9) while moving mass towards the foot decreases the efficiency (e.g. from (a) to (c) in Fig. 9). A practical alternative to efficiently distributing the mass in the experimental model is to reposition the spring joints and their housings to the top joint. This design change has no influence on the charging mechanics [30]. For the current force-to-weight ratio, this increases the efficiency from 0.5 to around 0.75, which equates to a 31% increase in jump height from 1.6 m to 2.1 m. This elastic–kinetic energy conversion efficiency aligns with that of several previous jumping robots (e.g. EPFL jumper [51], flea-inspired jumper [34], as shown in Fig. 9). Alternatively, a similar effect could be achieved by tapering the leg segment structure towards the unsprung ground contact. Such structural optimisation is case specific and is not in scope for the generalised modelling approach in this present work. However, it poses an interesting route for future studies.

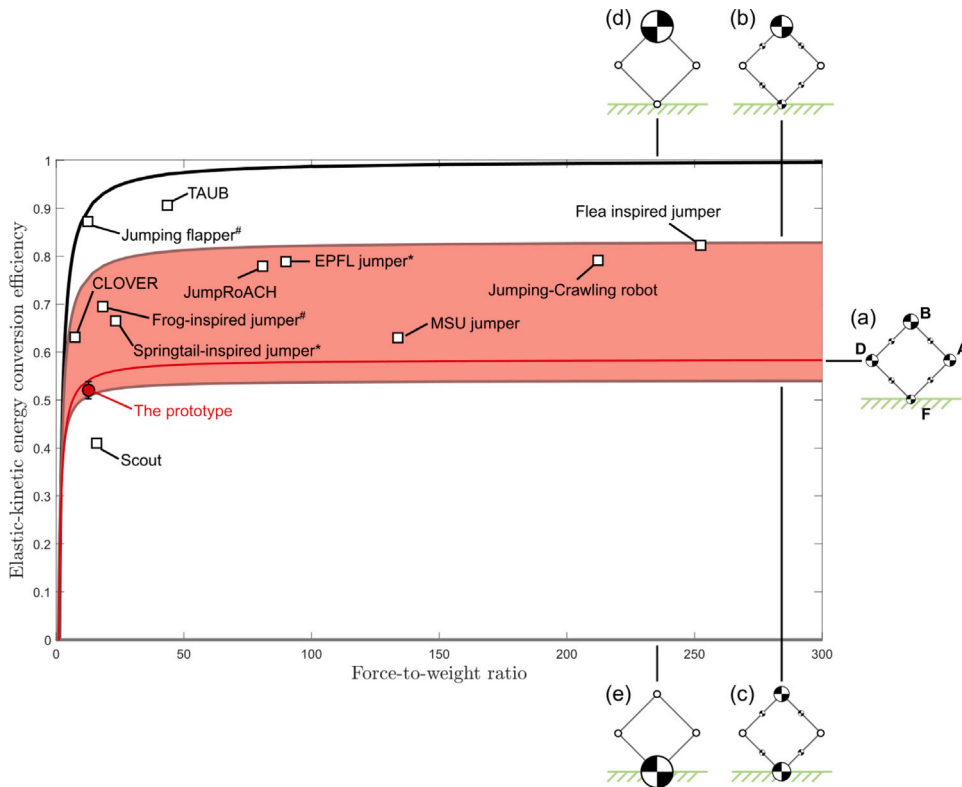

**Fig. 9.** The elastic–kinetic energy conversion efficiency variation with the force-to-weight ratio for the size of the experimental model in the present work. The lines represent different mass distributions. (a) (solid red line) mass distribution of the experimental model in this work, with a maximum energy efficiency of around 0.58. The red coloured region shows the predicted energy efficiency if the mass of the knee joints and the rotational springs in the robot were repositioned to (b) the body (joint B) or (c) the foot (joint F). The theoretical bounds on the elastic–kinetic energy efficiency for this size of the system are set by two conceptual models: (d) a system where the mass is concentrated at the body; (e) a system with all mass concentrated at the foot, which can never take-off, regardless of the force-to-weight ratio. Experimental measurements from previous jumping robots are taken from [32,34,35,43–47,51]. \*The peak force is approximated by its stored elastic potential energy and its characteristic length of the robotic system by the formula,  $F_{max} = \frac{2PE_s}{d}$ . #The peak force is considered to be equal to the peak ground reaction force. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

### 6.3. Application of the present theory to jumping robot technologies

The previous section explored the influence of the mass distribution and force-to-weight ratio on the elastic–kinetic energy conversion efficiency. This section aims to apply this knowledge to existing robotic technologies. Fig. 10 shows the jump height of a range of previous jumping robots, with predictions of how their jump heights would increase if the inertial effects of rotational linkage, revolute joints and unsprung foot were removed. Theoretical models presented in Sections 2 and 3 are included for reference. These models represent the theoretical upper limits of jump height for systems driven by a linear spring (Section 2.1) or an ideal constant force spring (Section 3.3).

While the experimental dataset in Fig. 10 is not exhaustive, it is suggestive of the fact that as the force-to-weight ratio increases, normalised jump height increases. Previous designs typically achieve lower normalised jump heights than the inertialess linear spring model (e.g. [1,28,32,34,35,43–45,47,51]). The highest jumping robot [1] reaches around 25% of the inertialess ideal spring and 50% of the inertialess linear spring.

By reallocating all system mass to the top of the structure, the inertial effect can be eliminated. Obviously this is not practically feasible, but it does provide a useful upper limit to bind the performance capabilities of individual designs. For [1,35], removing inertial effects would more than double the jump height. For the other robots shown in Fig. 10, removing inertial effects would increase the jump height by 11%–58%. While the study does not focus on landing dynamics, it should be noted that numerous technology solutions exist to provide stability in landing [52–54] or for post-landing reorientation [55,56], which do not inherently lower the centre of gravity. Therefore the present findings on strategic mass allocation are applicable to practical robots with stable landing systems. They are also applicable to applications that do not require stable landings, such as [16,18,28].

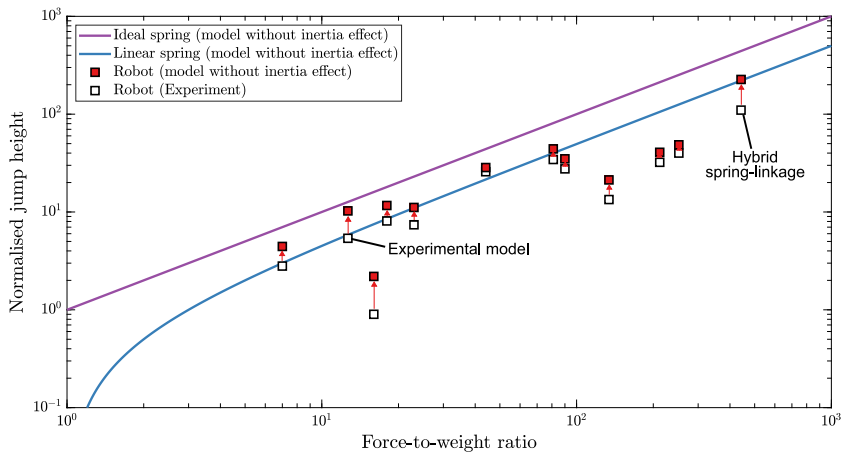


Fig. 10. The normalised jump height of the experimental model and the previous spring-driven jumping robots [1,28,32,34,35,43–47,51]. The white markers indicate the experimental jump height, while the orange markers indicate the predicted jump height when the inertial effect is removed. The jump height of the robots is derived from the experimental measurement of the take-off velocity using the formula,  $h = \frac{1}{2g}(\dot{y}_{to})^2$ .

### 7. Conclusion

This paper analysed the jumping dynamics of the abstracted prismatic and rotational spring-driven models and used them as the foundations to study a multibody model of a rhomboidal linkage, as a representation of a physical jumping system. The key findings identify the primary sources of inefficiency as residual elastic potential energy in the springs at the point of take-off, and the motion of the individual segments relative to the centre of mass. The modelling results are experimentally validated by a physical demonstrator, which converts around 50% of the stored elastic potential energy into vertical kinetic energy of the centre mass.

Another key contribution of this work is providing mathematical evidence showing that the amount of residual elastic potential energy in the springs is exacerbated by premature take-off, induced by the centripetal forces on the rotational bodies in the linkages. This finding applies to single and multiple degrees of freedom systems driven by springs. The undesirable dynamic phenomenon could be improved by reducing the overall structural mass of the leg, however this task is non-trivial and would require a case-specific structural analysis, including other mechanical properties of the physical system (e.g. damping capacity of the material). Energy loss to the horizontal and rotational motion will always occur with a rotational linkage; even the highest jumping spring-linkage was estimated to lose 50% of its stored energy to the inertial effect [1].

A solution to this is using an alternative structural configuration without rotational components, such as a prismatic linkage with a linear spring [10]. However, these have been shown to offer considerably lower energy storage capacity for a given spring-charging force [30] and will suffer from the delayed take-off due to the nonzero unsprung ground interface. So there is a direct tradeoff in mechanism design between topologies that are effective for storing spring energy, and those that are effective for releasing spring energy. Because of this, it can be hypothesised that no ideal jumping system with 100% mechanical-kinetic efficiency exists, even when damping and frictional effects are neglected. These findings hold true for the system if it were to be scaled in size, but retain the same charging force, mass, and inertia.

A practicable design option identified for improving the performance of the jumping robot involves redistributing component mass towards the top of the robot and structural optimisation of the links to taper the mass towards the bottom of the robot. However, implementing such structural improvements, along with considering other detailed mechanical properties of the physical system (e.g., structural damping and joint friction), is specific to each design and cannot be generalised. Therefore, these aspects present potential avenues for future work that could build upon this contribution and provide a more comprehensive design guideline.

### CRedit authorship contribution statement

**John Lo:** Writing – original draft, Visualization, Validation, Software, Resources, Project administration, Methodology, Investigation, Formal analysis, Data curation, Conceptualization. **Ben Parslew:** Writing – review & editing, Software, Project administration.

### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Data availability

No data was used for the research described in the article.

## Appendix A. Supplementary data

Supplementary material related to this article can be found online at <https://doi.org/10.1016/j.mechmachtheory.2024.105688>.

## References

- [1] E.W. Hawkes, C. Xiao, R.-A. Peloquin, C. Keeley, M.R. Begley, M.T. Pope, G. Niemeyer, Engineered jumpers overcome biological limits via work multiplication, *Nature* 604 (7907) (2022) 657–661, <http://dx.doi.org/10.1038/s41586-022-04606-3>.
- [2] M. Ilton, M.S. Bhamla, X. Ma, S.M. Cox, L.L. Fitchett, Y. Kim, J. sung Koh, D. Krishnamurthy, C.-Y. Kuo, F.Z. Temel, A.J. Crosby, M. Prakash, G.P. Sutton, R.J. Wood, E. Azizi, S. Bergbreiter, S.N. Patek, The principles of cascading power limits in small, fast biological and engineered systems, *Science* 360 (6387) (2018) 1082, <http://dx.doi.org/10.1126/science.aao1082>.
- [3] G.P. Sutton, M. Burrows, Biomechanics of jumping in the flea, *J. Exp. Biol.* 214 (5) (2011) 836–847, <http://dx.doi.org/10.1242/jeb.052399>.
- [4] H.C. Bennet-Clark, E.C.A. Lucey, The jump of the flea: A study of the energetics and a model of the mechanism, *J. Exp. Biol.* 47 (1) (1967) 59–76, <http://dx.doi.org/10.1242/jeb.47.1.59>.
- [5] C. Wan, Z. Hao, Structures, properties, and energy-storage mechanisms of the semi-lunar process cuticles in locusts, *Sci. Rep.* 6 (2016) 35219, <http://dx.doi.org/10.1038/srep35219>.
- [6] M. Burrows, G.P. Sutton, Locusts use a composite of resilin and hard cuticle as an energy store for jumping and kicking, *J. Exp. Biol.* 215 (19) (2012) 3501–3512, <http://dx.doi.org/10.1242/jeb.071993>.
- [7] H. Bennet-Clark, The energetics of the jump of the locust *schistocerca gregaria*, *J. Exp. Biol.* 63 (1) (1975) 53–83.
- [8] H.S. Seifert, The lunar pogo stick, *J. Spacecr. Rockets* 4 (7) (1967) 941–943, <http://dx.doi.org/10.2514/3.28991>.
- [9] R. Degner, M.H. Kaplan, J. Manning, R. Meetin, S. Pasternack, S. Peterson, H. Seifert, The lunar hopping transporter (NASA-CR-130010), 1971.
- [10] P. Fiorini, S. Hayati, M. Heverly, J. Gensler, A hopping robot for planetary exploration, in: 1999 IEEE Aerospace Conference. Proceedings (Cat. No.99TH8403), Vol. 2, 1999, pp. 153–158, <http://dx.doi.org/10.1109/AERO.1999.793156>, vol.2.
- [11] H. Tsukagoshi, M. Sasaki, A. Kitagawa, T. Tanaka, Jumping robot for rescue operation with excellent traverse ability, in: 2005 International Conference on Advanced Robotics, ICAR '05, Proceedings, Vol. 2005, 2005, pp. 841–848, <http://dx.doi.org/10.1109/ICAR.2005.1507505>.
- [12] S. Dubowsky, S. Kesner, J.-S. Plante, P. Boston, Hopping mobility concept for search and rescue robots, *Ind. Robot.* 35 (3) (2008) 238–245, <http://dx.doi.org/10.1108/01439910810868561>.
- [13] J. Zhang, G. Song, G. Qiao, T. Meng, H. Sun, An indoor security system with a jumping robot as the surveillance terminal, *IEEE Trans. Consum. Electron.* 57 (4) (2011) 1774–1781, <http://dx.doi.org/10.1109/TCE.2011.6131153>.
- [14] G. Song, K. Yin, Y. Zhou, X. Cheng, A surveillance robot with hopping capabilities for home security, *IEEE Trans. Consum. Electron.* 55 (4) (2009) 2034–2039, <http://dx.doi.org/10.1109/TCE.2009.5373766>.
- [15] H. Rad, P. Gregorio, M. Buehler, Design, modeling and control of a hopping robot, in: Proceedings of 1993 IEEE/RSJ International Conference on Intelligent Robots and Systems, IROS'93, Vol. 3, 1993, pp. 1778–1785, <http://dx.doi.org/10.1109/IROS.1993.583877>, vol.3.
- [16] R. Armour, K. Paskins, A. Bowyer, J. Vincent, W. Megill, Jumping robots: a biomimetic solution to locomotion across rough terrain, *Bioinspir. Biomim.* 3 (3) (2008) 039801, <http://dx.doi.org/10.1088/1748-3182/2/3/S01>.
- [17] M. Kovač, M. Schlegel, J.-C. Zufferey, D. Floreano, A miniature jumping robot with self-recovery capabilities, in: 2009 IEEE/RSJ International Conference on Intelligent Robots and Systems, 2009, pp. 583–588, <http://dx.doi.org/10.1109/IROS.2009.5354005>.
- [18] M. Kovac, M. Schlegel, J.-C. Zufferey, D. Floreano, Steerable miniature jumping robot, *Auton. Robots* 28 (3) (2010) 295–306, <http://dx.doi.org/10.1007/s10514-009-9173-4>.
- [19] T. Ho, S. Lee, A shape memory alloy-actuated bio-inspired mesoscale jumping robot, *Int. J. Adv. Robot. Syst.* 9 (3) (2012) 91, <http://dx.doi.org/10.5772/51318>.
- [20] Z. Zhakypov, K. Mori, K. Hosoda, J. Paik, Designing minimal and scalable insect-inspired multi-locomotion millirobots, *Nature* 571 (7765) (2019) 381–386, <http://dx.doi.org/10.1038/s41586-019-1388-8>.
- [21] C. Kim, D.-J. Lee, S.-P. Jung, G.-P. Jung, Diplo: a miniaturized hopping robot via lightweight and compact actuator design for power amplification, *Bioinspir. Biomim.* 18 (4) (2023) 046006, <http://dx.doi.org/10.1088/1748-3190/acd290>.
- [22] Z. Yu, Y. Zeng, C. Guo, Mechanical design and performance analysis of a weevil-inspired jumping mechanism, *Machines* 10 (3) (2022) <http://dx.doi.org/10.3390/machines10030161>.
- [23] J.-S. Koh, E. Yang, G.-P. Jung, S.-P. Jung, J.H. Son, S.-I. Lee, P.G. Jablonski, R.J. Wood, H.-Y. Kim, K.-J. Cho, Jumping on water: Surface tension-dominated jumping of water striders and robotic insects, *Science* 349 (6247) (2015) 517–521, <http://dx.doi.org/10.1126/science.aab1637>.
- [24] Z. ZiQiang, Z. Jing, C. HanLong, C. DianSheng, A survey of bioinspired jumping robot: Takeoff, air posture adjustment, and landing buffer, *Appl. Bionics Biomech.* 2017 (Article ID 4780160) (2017) 22, <http://dx.doi.org/10.1155/2017/4780160>.
- [25] C. Zhang, W. Zou, L. Ma, Z. Wang, Biologically inspired jumping robots: A comprehensive review, *Robot. Auton. Syst.* 124 (C) (2020) <http://dx.doi.org/10.1016/j.robot.2019.103362>.
- [26] G. Ribak, Insect-inspired jumping robots: challenges and solutions to jump stability, *Curr. Opin. Insect Sci.* 42 (2020) 32–38, <http://dx.doi.org/10.1016/j.cois.2020.09.001>.
- [27] X. Mo, W. Ge, M. Miraglia, F. Inglese, D. Zhao, C. Stefanini, D. Romano, Jumping locomotion strategies: From animals to bioinspired robots, *Appl. Sci.* 10 (23) (2020) 8607, <http://dx.doi.org/10.3390/app10238607>.
- [28] E. Hale, N. Schara, J. Burdick, P. Fiorini, A minimally actuated hopping rover for exploration of celestial bodies, in: Proceedings 2000 ICRA. Millennium Conference. IEEE International Conference on Robotics and Automation. Symposia Proceedings (Cat. No.00CH37065), Vol. 1, 2000, pp. 420–427, <http://dx.doi.org/10.1109/ROBOT.2000.844092>, vol.1.
- [29] R.A. Simmons, W. Soedel, Surging in coil springs, in: *International Compressor Engineering Conference*, 1996, p. 1190.
- [30] J. Lo, B. Parslew, Elastic energy storage of spring-driven jumping robots, 2023, <http://dx.doi.org/10.48550/arXiv.2311.02188>, arXiv arXiv:2311.02188.
- [31] J. Lo, B. Parslew, An energetic analysis of rhomboidal linkage robots for hopping lunar exploration, in: 2021 Second International Symposium on Instrumentation, Control, Artificial Intelligence, and Robotics, ICA-SYMP, 2021, pp. 1–5, <http://dx.doi.org/10.1109/ICA-SYMP50206.2021.9358244>.
- [32] G.-P. Jung, C. Casarez, S.-P. Jung, R. Fearing, K.-J. Cho, An integrated jumping-crawling robot using height-adjustable jumping module, in: 2016 IEEE International Conference on Robotics and Automation, ICRA, 2016, pp. 4680–4685, <http://dx.doi.org/10.1109/ICRA.2016.7487668>.



- [33] S. Bergbreiter, K.S.J. Pister, Design of an autonomous jumping microrobot, in: Proceedings 2007 IEEE International Conference on Robotics and Automation, 2007, pp. 447–453, <http://dx.doi.org/10.1109/ROBOT.2007.363827>.
- [34] J.-S. Koh, S.-P. Jung, M. Noh, S.-W. Kim, K.-J. Cho, Flea inspired catapult mechanism with active energy storage and release for small scale jumping robot, in: 2013 IEEE International Conference on Robotics and Automation, 2013, pp. 26–31, <http://dx.doi.org/10.1109/ICRA.2013.6630552>.
- [35] J. Zhao, G. Liu, J. Yan, X. Zang, Scout robot with wheeling-hopping combination locomotion, *Ind. Robot.* 36 (3) (2009) 244–248, <http://dx.doi.org/10.1108/01439910910950504>.
- [36] L. Bai, F. Zheng, X. Chen, Y. Sun, J. Hou, Design and experimental evaluation of a single-actuator continuous hopping robot using the geared symmetric multi-bar mechanism, *Appl. Sci.* 9 (1) (2018) 13, <http://dx.doi.org/10.3390/AP9010013>.
- [37] M. Woodward, M. Sitti, Multimo-bat: A biologically inspired integrated jumping-gliding robot, *Int. J. Robot. Res.* 33 (2014) 1511–1529, <http://dx.doi.org/10.1177/0278364914541301>.
- [38] C. Hong, D. Tang, Q. Quan, Z. Cao, Z. Deng, A combined series-elastic actuator and parallel-elastic leg no-latch bio-inspired jumping robot, *Mech. Mach. Theory* 149 (2020) 103814, <http://dx.doi.org/10.1016/j.mechmachtheory.2020.103814>.
- [39] J. Zhao, N. Xi, B. Gao, M.W. Mutka, L. Xiao, Design and testing of a controllable miniature jumping robot, in: 2010 IEEE/RSJ International Conference on Intelligent Robots and Systems, 2010, pp. 3346–3351, <http://dx.doi.org/10.1109/IROS.2010.5648982>.
- [40] F. Wang, C. Li, S. Niu, P. Wang, H. Wu, B. Li, Design and analysis of a spherical robot with rolling and jumping modes for deep space exploration, *Machines* 10 (2) (2022) <http://dx.doi.org/10.3390/machines10020126>.
- [41] F. Zhao, W. Wang, J. Wyrwa, J. Zhang, W. Du, P. Zhong, Design and demonstration of a flying-squirrel-inspired jumping robot with two modes, *Appl. Sci.* 11 (8) (2021) <http://dx.doi.org/10.3390/app11083362>.
- [42] W.-J. Chang, C.-L. Chang, J.-H. Ho, P.-C. Lin, Design and implementation of a novel spherical robot with rolling and leaping capability, *Mech. Mach. Theory* 171 (2022) 104747, <http://dx.doi.org/10.1016/j.mechmachtheory.2022.104747>.
- [43] T. Truong, H.V. Phan, H. Park, Design and demonstration of a bio-inspired flapping-wing-assisted jumping robot, *Bioinspir. Biomim.* 14 (2019) 036010, <http://dx.doi.org/10.1088/1748-3190/aaff55>.
- [44] G. Jung, C.S. Casarez, J. Lee, S. Baek, S. Yim, S. Chae, R.S. Fearing, K. Cho, JumpRoACH: A trajectory-adjustable integrated jumping–crawling robot, *IEEE/ASME Trans. Mechatronics* 24 (3) (2019) 947–958, <http://dx.doi.org/10.1109/TMECH.2019.2907743>.
- [45] J. Zhao, J. Xu, B. Gao, N. Xi, F.J. Cintrón, M.W. Mutka, L. Xiao, MSU jumper: A single-motor-actuated miniature steerable jumping robot, *IEEE Trans. Robot.* 29 (3) (2013) 602–614, <http://dx.doi.org/10.1109/TRO.2013.2249371>.
- [46] V. Zaitsev, O. Gvirsman, U. Ben Hanan, A. Weiss, A. Ayali, G. Kosa, A locust-inspired miniature jumping robot, *Bioinspir. Biomim.* 10 (6) (2015) <http://dx.doi.org/10.1088/1748-3190/10/6/066012>, 066012–066012.
- [47] Y. Ma, Y. Wei, D. Kong, A biologically inspired height-adjustable jumping robot, *Appl. Sci.* 11 (11) (2021) <http://dx.doi.org/10.3390/app11115167>.
- [48] Y. Zhang, L. Zhang, W. Wang, Y. Li, Q. Zhang, Design and implementation of a two-wheel and hopping robot with a linkage mechanism, *IEEE Access* 6 (2018) 42422–42430, <http://dx.doi.org/10.1109/ACCESS.2018.2859840>.
- [49] B. Parslew, G. Sivalingham, W. Crowther, A dynamics and stability framework for avian jumping take-off, *R. Soc. Open Sci.* 5 (10) (2018) 181544, <http://dx.doi.org/10.1098/rsos.181544>.
- [50] W. Roberts, W. Levine, F. Zajac, Propelling a torque controlled baton to a maximum height, *IEEE Trans. Autom. Control* 24 (5) (1979) 779–782, <http://dx.doi.org/10.1109/TAC.1979.1102148>.
- [51] M. Kovac, M. Fuchs, A. Guignard, J.-C. Zufferey, D. Floreano, A miniature 7g jumping robot, in: 2008 IEEE International Conference on Robotics and Automation, 2008, pp. 373–378, <http://dx.doi.org/10.1109/ROBOT.2008.4543236>.
- [52] D.W. Haldane, J.K. Yim, R.S. Fearing, Repetitive extreme-acceleration (14-g) spatial jumping with salto-1P, in: 2017 IEEE/RSJ International Conference on Intelligent Robots and Systems, IROS, 2017, pp. 3345–3351, <http://dx.doi.org/10.1109/IROS.2017.8206172>.
- [53] J. Zhang, G. Song, Y. Li, G. Qiao, A. Song, A. Wang, A bio-inspired jumping robot: Modeling, simulation, design, and experimental results, *Mechatronics* 23 (8) (2013) 1123–1140, <http://dx.doi.org/10.1016/j.mechatronics.2013.09.005>.
- [54] J. Zhao, T. Zhao, N. Xi, M.W. Mutka, L. Xiao, MSU tailbot: Controlling aerial maneuver of a miniature-tailed jumping robot, *IEEE/ASME Trans. Mechatronics* 20 (6) (2015) 2903–2914, <http://dx.doi.org/10.1109/TMECH.2015.2411513>.
- [55] R.S.F. Chen Li, R.J. Full, Mechanical principles of dynamic terrestrial self-righting using wings, *Adv. Robot.* 31 (17) (2017) 881–900, <http://dx.doi.org/10.1080/01691864.2017.1372213>.
- [56] V. Zaitsev, O. Gvirsman, U.B. Hanan, A. Weiss, A. Ayali, G. Kosa, A locust-inspired miniature jumping robot, *Bioinspir. Biomim.* 10 (6) (2015) 066012, <http://dx.doi.org/10.1088/1748-3190/10/6/066012>.